TECHNICAL CHARACTERISTICS

MDRY120EB

Dry


Table

Dry table, simplicity in its ultimate expression. Multi-size, double or triple. It presents the possibility of arranging it in different heights, widths and lengths. Its simplicity and sobriety makes the Dry table the perfect choice for any space.

DESIGNED BY ONDARRETA TEAM



ondarreta

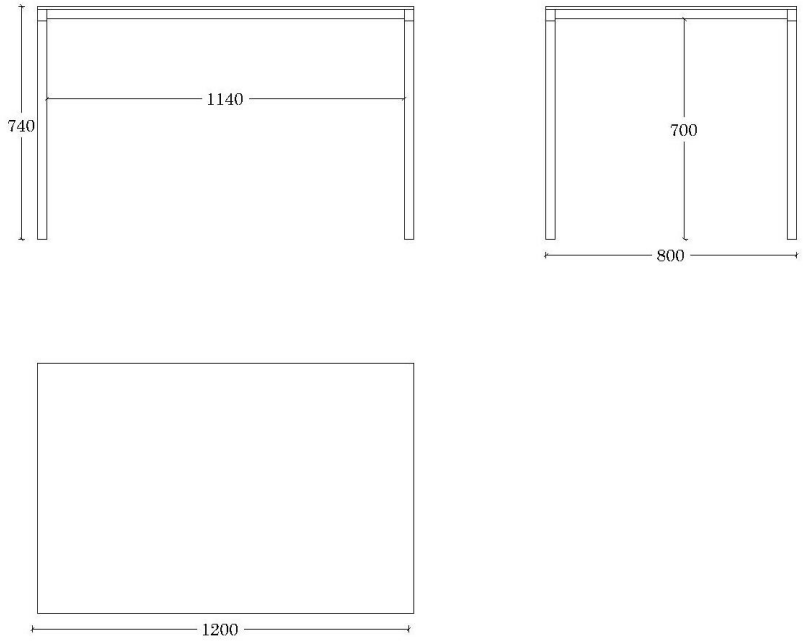

DIMENSIONS

Heights 40 / 74,5 / 90 / 110: 600 x 600 / 700 x 700 / 800 x 800 / 900 x 900 / 1200 x 1200 / 1000 x 500 / 1100 x 700 / 1200 x 600 / 1200 x 800 /

Heights 40 / 74,5 / 90: 1400 x 800 / 1600 x 800 / 1800 x 900 / 2000 x 900

Heights 40 / 74,5: 2200 x 900

Free height 35 cm for 40 height, 70 cm for 74,5 height, 85 for 90 height and 105 for 110 height

WEIGHT

11,5 kg/14,3 kg / 15,5 kg (600 x 600)

14,5 kg / 17,4 kg / 18,5 kg (700 x 700)

16,3 kg / 19,1 kg / 20 kg (800 x 800)

22 kg / 25 kg / 26 kg (900 x 900)

37 kg / 39 kg (1200 x 1200)

14,5 kg / 17,5 kg / 18 kg (1000 x 500)

21 kg / 24 kg / 25 kg (1100 x 700)

20 kg / 23 kg /24 kg (1200 x 600)

25,5 kg / 28 kg / 30 kg (1200 x 800)

29 kg / 32 kg (1400 x 800)

33 kg / 36 kg (1600 x 800)

41 kg / 44 kg (1800 x 900)

45,5 kg / 48,5 kg (2000 x 900)

50 kg / 52,5 kg (2200 x 900)

PACKAGING

1 table per box

ACCESORIES

Access hole
Top access (white or black)
Top access + standard power/ data (white or black)
Cable guide tray
Leg cable tray
CPU holder
Drawers
Protector screen

ORIGEN

100% Fabricado en Europa

DESIGN

Ondarreta Team

ondarreta







COMPONENTS

STRUCTURE

Material
30 mm (1.2") side and 2 mm (0.08") thickness cold laminated St-37 quality steel tube.
Tensile Strength: 340-470 N/mm2 (49,300-68,160 psi); Elastic Limit > 235 N/mm2 (32,080 psi); Elongation > 25%, Surface Hardness > 110 HB.

Finish

Colour Epoxy

TABLETOP

Laminate
High pressure laminate glued and pressed in high temperatures on a 20 mm (0.8") thickness technical wood table with a 10 mm (0.4") thick perimeter machining that leaves a visible edge of 10 mm (0.4"). It's edged with a PVC panel glued with a special hot melt adhesive.

Laminate+Birch Plywood
High pressure laminate glued and pressed in high temperatures on a 20mm (0.8") thickness birch wood table with a 10 mm (0.4") thick perimeter machining that leaves a visible edge of 10 mm (0.4").

Fenix+Birch Plywood
Fenix sheet glued and pressed in high temperatures on a 20 mm (0.8") thickness birch wood table with a 10 mm (0.4") thick perimeter machining that leaves a visible edge of 10 mm (0.4").
Fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

Beech
Beech plywood board shell, 20 mm (7,9") thick CNC machined with a 10 mm (0.4") thick perimeter machining that leaves a visible edge of 10 mm (0.4").

Oak
20 mm natural Oak wood panel glued and pressed in high temperatures on a technical wood table. It's edged with a natural Oak wood panel glued with a special hot melt adhesive with a 10 mm (0.4") thick perimeter machining that leaves a visible edge of 10 mm (0.4").

Porcelain + MDF
3 mm thick porcelain sheet fixed on a support in MDF 19 mm thick lacquered.

Tabletop's technical characteristics:
Urea-formol glue: low formaldehyde emission (E1 European Normative)
The wood has the PEFC certificate.

Finish

Stained, lamínate, porcelain or fenix

METAL FINISHES

ondarreta



EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical Characteristics:

Thickness (ISO 2360): between 60 and 90 µm.
Adherence (ISO 2409): Grade: 0 (maximum adherence)

WOOD FINISHES

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

Technical Characteristics:

Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds