TECHNICAL CHARACTERISTICS

MGINRB

Ginger


Table

Craftsmanship and technique go together in the Ginger table design. Available in double versions, this table stands out for the complex wooden curvature of its legs and the round shapes of the tabletop.

DESIGNED BY SEBASTIAN HERKNER



ondarreta

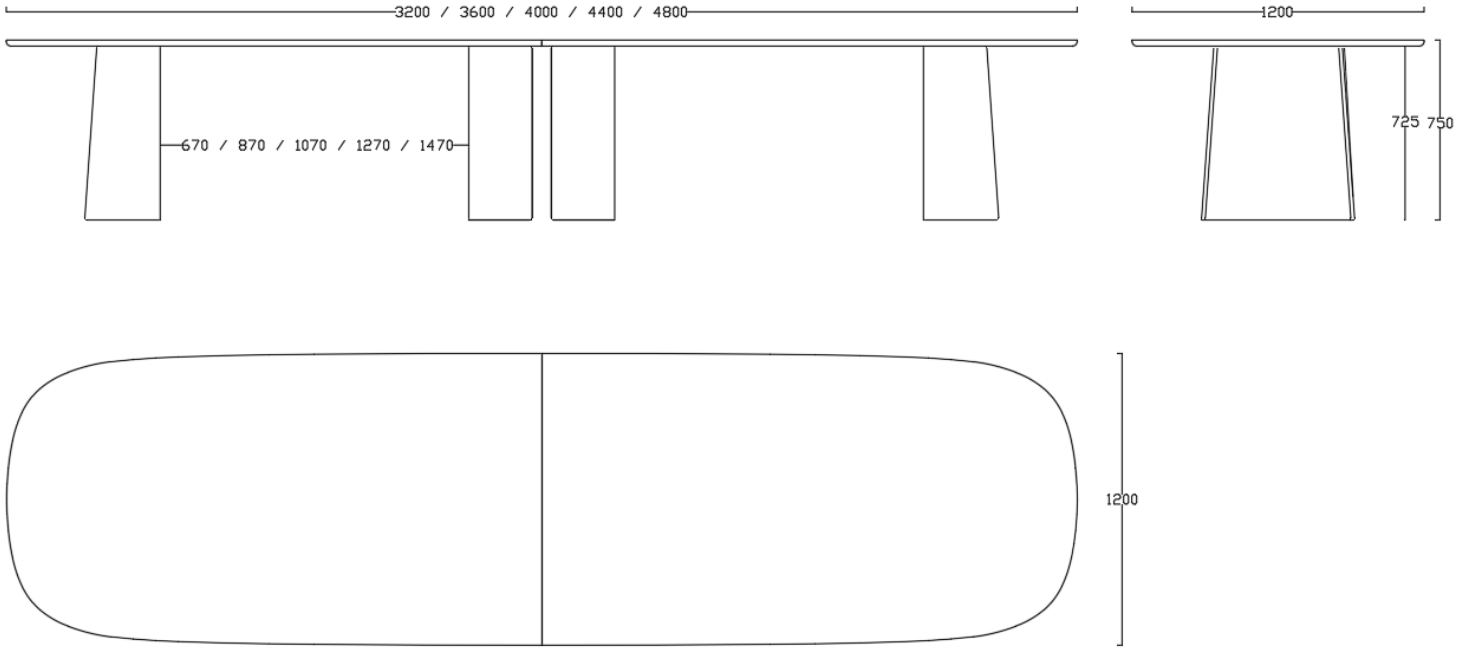

DIMENSIONS

Height: 75 cm (29,5")
Free height: 72,5 cm (28,5")
320 cm x 120 cm (126" x 47,2") [width x depth]
360 cm x 120 cm (141,7" x 47,2") [width x depth]
400 cm x 120 cm (157,5" x 47,2") [width x depth]
440 cm x 120 cm (173,2" x 47,2") [width x depth]
480 cm x 120 cm (189" x 47,2") [width x depth]

WEIGHT

88 kg [194 lb] (320x120)
96 kg [211,6 lb] (360x120)
105 kg [231,5 lb] (400x120)
114 kg [251,3 lb] (440x120)
122 kg [269lb] (480x120)

PACKAGING

Palletized

320 x 120 cm
Box 1: 175 cm x 130 cm x 10 cm (68,9" x 51,2" x 3,9")
Box 2: 175 cm x 130 cm x 10 cm (68,9" x 51,2" x 3,9")
Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 4: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 5: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 6: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

360 x 120 cm
Box 1: 195 cm x 130 cm x 10 cm (76,8" x 51,2" x 3,9")
Box 2: 195 cm x 130 cm x 10 cm (76,8" x 51,2" x 3,9")
Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 4: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 5: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 6: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

400 x 120 cm
Box 1: 215 cm x 130 cm x 10 cm (84,6" x 51,2" x 3,9")
Box 2: 175 cm x 130 cm x 10 cm (84,6" x 51,2" x 3,9")
Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 4: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 5: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 6: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

440 x 120 cm
Box 1: 235 cm x 130 cm x 10 cm (92,5" x 51,2" x 3,9")
Box 2: 235 cm x 130 cm x 10 cm (92,5" x 51,2" x 3,9")
Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 4: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 5: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 6: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

480 x 120 cm
Box 1: 255 cm x 130 cm x 10 cm (100,4" x 51,2" x 3,9")
Box 2: 255 cm x 130 cm x 10 cm (100,4" x 51,2" x 3,9")
Box 3: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 4: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 5: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")
Box 6: 62 cm x 50 cm x 80 cm (24,4" x 19,7" x 31,5")

ACCESORIES

Top Access inlay with cover in the same finish as the tabletop

Cable tray for Top Access inlay

Electrification fixed to the cable tray

CERTIFICATION

Designed and certified in accordance with the Ecodesign standard UNE-EN ISO 14006:2011

PEFC certify wood

ORIGIN

100% Made in Europe

DESIGN

Sebastian Herkner

ondarreta







COMPONENTS

LEGS

Oak

Oak wood on 15 mm (0,6") thick beech. It is made with especially treated sheets to optimize bending, reinforced with alternate arrangement of fibers to gain resistance, glued, pressed and CNC machined.

Central legs with a cutout for cable management.

Finish

Stained wood

TABLETOP SUPPORT

Steel

5 mm (0.2") thick laser cut steel sheet.

Finish

Epoxy black

TABLETOP

Oak + birch plywood

European oak sheet glued and pressed in high temperatures on a Birch plywood wood table with beveled chants.

Arpa fenix + birch plywood

Combination of arpa fenix sheet and beveled birch plywood. Arpa fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

Technical characteristics:

Urea-formol glue: low formaldehyde emission (E1 European Normative)

WOOD FINISH

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

Technical characteristics:

Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)