

TECHNICAL CHARACTERISTICS

ASUPRAEP

Supra

Armchair


The Supra chair, an elegant shell with character, in combination with different structures, is a perfect product for diverse spaces and uses.

Inspired on the structural beams constructive principles Supra achieves the feeling of both independent seat and back parts in a unique solid piece.

DESIGNED BY NOTE DESIGN STUDIO



ondarreta

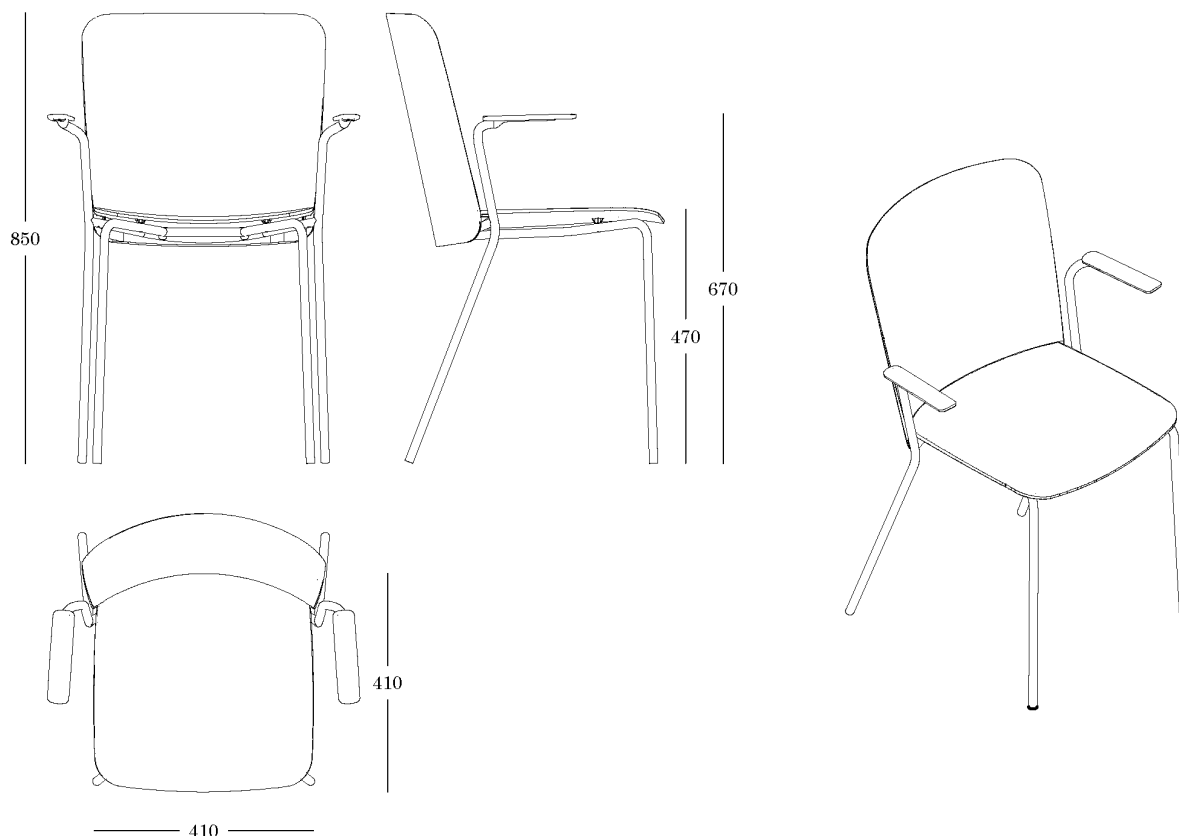

DIMENSIONS

60 cm x 52 cm x 85 cm x 47 cm x 67 cm
 [width x depth x height x seat height x arm height]
 (23.62 x 20.47 x 33.46 x 18.50 x 26.37 inches)

WEIGHT

5,60 kg

PACKAGING

Two Chairs per box.
 Box dimensions:
 60 cm x 56.3 cm x 100 cm
 (23.62 x 22.16 x 39.37 inches)

CERTIFICATION

Product tested under the European standard EN 16139:2013, category of severe use, L2.

ACCESORIES

Felt glides (black)
 Trolley
 Writing table
 Linking piece

STACKABILITY

Up to 20 units




ORIGIN

100% Made in Europe

DESIGN

Note Design Studio

ondarreta

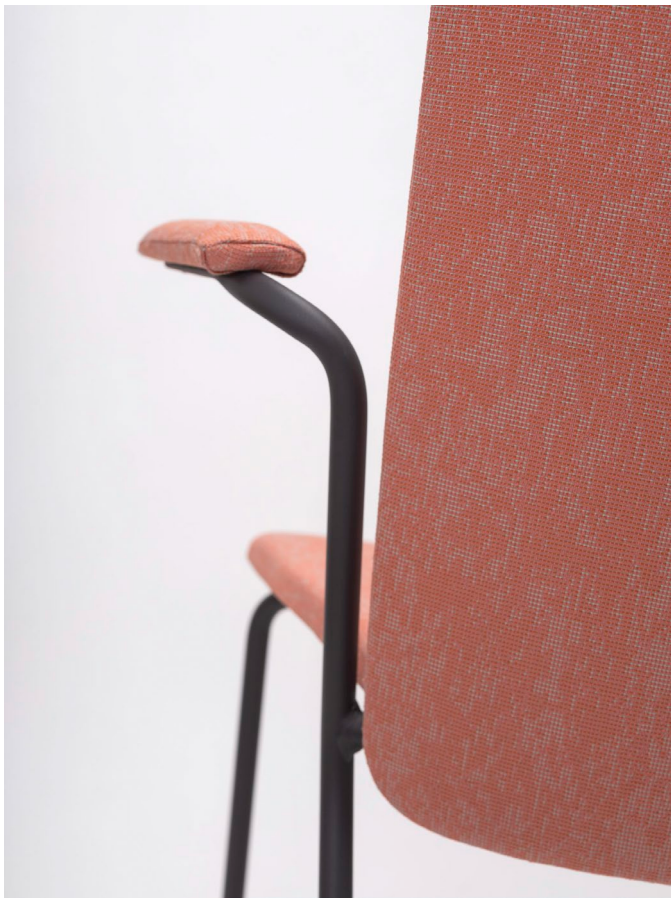

COMPONENTS

FRAME

Material

16mm (6.29 inches) side and 2 mm (0.78 inches) thickness cold laminated E-220 quality (EN 10305 Norm) steel tube.

Tensile Strength > 310 N/mm²;

Elastic limit > 220 N/mm²; Elongation > 23%

Finish

Colour epoxy

SHELL

Special Raw textured polypropylene

Special raw copolymer translucent textured polypropylene with matt finish. Very good mechanical properties, translucency and lightness.

Technical Features

Density (s/ ISO 1183): 900 kg/m³;

Yield stress (s/ ISO 527-1/-2): 23 N/mm²;

Flexural modulus (s/ ISO 178): 1100 N/ mm² (23°C)

Finish

Matt textured polypropylene, fully upholstered or seat pad upholstered.

UPHOLSTERY

Fully upholstered

Exclusive and unique upholstery system that allows the fabric a perfect adherence to the shell (both seat and back), maintaining the own chair's shape. Medium density polyether stuffing foam.

Upholstered seat pad

Exclusive and unique upholstery system that allows the fabric a perfect adherence to the seat, maintaining the own chair's shape. Medium density polyether stuffing foam.

STACKING PIECE

Stacking pp piece adjusted to the structure below the upholstered seat.



METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven cured at 200°C (392°F). Treatment option for outdoor protection.

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm. Adherence (ISO 2409): Grade: 0 (maximum adherence)

COM REQUIREMENTS

Seat pad fabric: 55 cm (21.65 inches)

Fully upholstered (seat + back): 120 cm (47.25 inches)