TECHNICAL CHARACTERISTICS

SBOBEBTC

Bob


Steel chair


Welcoming with smooth shapes, the Bob steel chair is inspired by the peacefulness of nature and the soul of the north to create pleasant, calm spaces, subtle yet contemporary. Its steel structure and its stackability makes this chair the perfect chair for any space.


DESIGNED BY NADIA ARRATIBEL



ondarreta

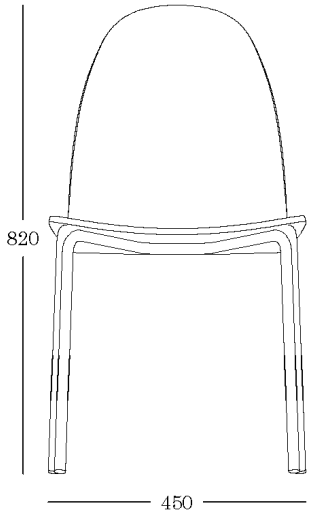

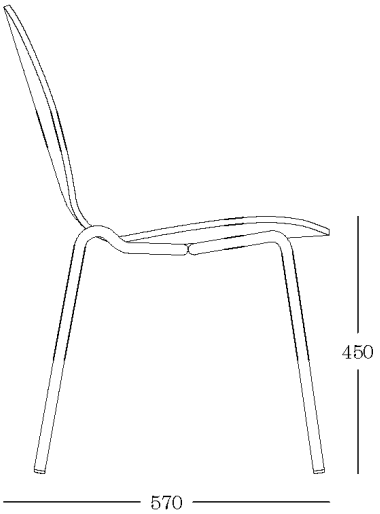

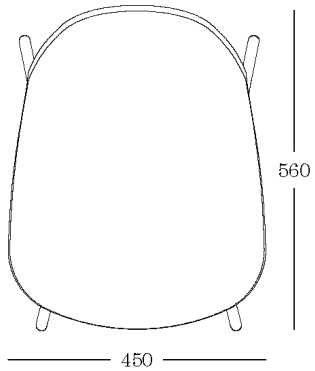

DIMENSIONS

45 cm x 57 cm x 82 cm x 45 cm
(17.7" x 22.4" x 32.3" x 17,7")
[width x depth x height x seat height]

WEIGHT

4,2 kg (9,3 lb)

PACKAGING

Two chairs per box, box dimensions: 63 cm x 49 cm x 99 cm (24.8" x 19.3" x 39")

CERTIFICATION

Product tested under the European standard EN 15373:2007, category of general use L2.

ACCESORIES

Felt glides (black)
Stacking piece
Trolley

STACKABILITY

Up to 5 units in wood version (acquiring the stacking piece)

ORIGIN

100% Made in Europe

DESIGN

Nadia Arratibel

ondarreta









COMPONENTS

FRAME

Material

18 mm (0.7”) side and 2 mm (0.08”) thickness cold laminated E-220 quality (EN-10305 Normative) steel tube.
Tensile Strength > 310 N/mm2 (44,960 psi);
Elastic Limit > 220 N/mm2 (31,900 psi);
Elongation > 23%

Finish

Colour Epoxy

SHELL

Beech

Beech plywood board shell, 10 mm (0.4”) thick. It's made with nine especially treated sheets, glued, pressed and CNC machined.

Oak

European Oak plywood board shell, 10 mm (0.4”) thick.

Fabrics

8 mm (0.31”) thick Beech plywood board shell. Medium density polyether stuffing foam.

Combi (Beech + fabric)

Two assembled Beech plywood sheets, upholstered front and varnished back (4 and 7 mm thick) (0.16” and 0.27”). Medium density polyether stuffing foam.

Technical characteristics:

Urea-formol glue: low formaldehyde emission (E1 European Normative)

The wood has the PEFC certificate.

Finish

Stained, lacquered, fabric or combi.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical characteristics:

Thickness (ISO 2360): between 60 and 90 µm.

Adherence (ISO 2409): Grade: 0 (maximum adherence)

ondarreta





WOOD FINISHES

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

LACQUER

Pigmented reactive drying lacquers.

Technical characteristics:
Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.

COM REQUIREMENTS

Full fabric: 90 cm (35,4”)
Combi: 90 cm (35,4”)