TECHNICAL CHARACTERISTICS

ADONETA

Don


Armchair


The Don armchair exudes personality with an industrial style that creates different, clean, elegant and comfortable spaces. A piece manufactured with a metal sheet structure and exposed screws on the back, to give a retro and original feel.


DESIGNED BY NADIA ARRATIBEL



ondarreta

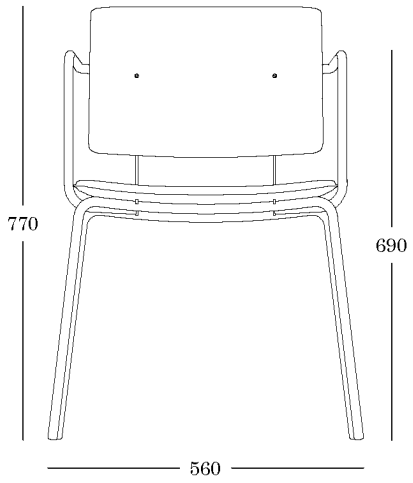

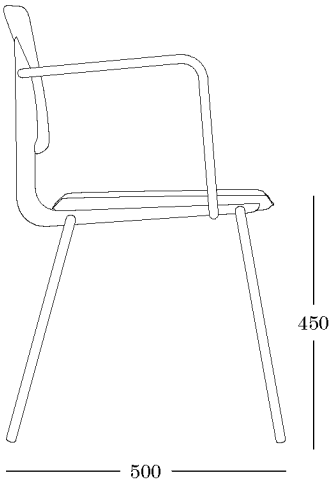

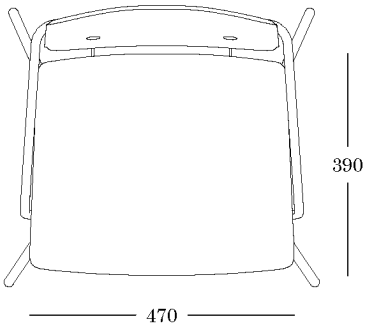

DIMENSIONS

56 cm x 50 cm x 77 cm x 45 cm x 69 cm (22” x 19,7” x 30.3” x 17,7” x 27,2”) [width x depth x height x seat height x armrests height]

WEIGHT

6,1 kg (13,4 lb)

PACKAGING

One chair per box, box dimensions: 62,5 cm x 58 cm x 99,5 cm (24.6” x 22.8” x 39.2”)

CERTIFICATION

Product tested under the European standard EN 16139:2013, category of general use L1.

ACCESORIES

Felt glides

ORIGIN

100% Made in Europe

DESIGN

Nadia Arratibel

ondarreta









COMPONENTS

FRAME

Material
16 mm (0.6”) side and 2 mm (0.08”) thickness cold laminated E-220 quality (EN-10305 Normative) steel tube.

Technical characteristics:
E-220 quality (EN-10305 Normative) steel tube.
Tensile Strength > 310 N/mm² (44,960 psi);
Elastic Limit > 220 N/mm² (31,900 psi); Elongation > 23%

Finish

Colour epoxy

SEAT AND BACK

Phenolic resin laminate
6 mm/ 5,5 mm (0.24” / 0.22”) thick Phenolic Laminate: resin treated paper fibers pressed in high temperatures and covered with natural wood or melamine.

Technical characteristics:

Density (EN ISO 1.183): 1350 kg/m³ (84.3 lb/ft³);
Impact Resistance (EN 438-2): ball height > 1800 mm (70.9”), mark’s diameter < 10 mm (0.4”);
Tensile Strength (EN ISO 527-2): 60 N/mm² (8700 psi);
Reaction to Fire (EN 13.501-1): Euroclass C-s2,d0

Fabrics
8 mm (0.31”) thick Beech plywood board shell. Medium density polyether stuffing foam.

Finish
Phenolic resin laminate or fabric.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical characteristics:
Thickness (ISO 2360): between 60 and 90 µm.
Adherence (ISO 2409): Grade: 0 (maximum adherence)

COM REQUIREMENT

Full fabric: 80 cm (31,5”)

ondarreta