TECHNICAL CHARACTERISTICS

MDOFC100EEA

Do


Table

Don's newest incorporation, Do Tables. Maintaining of it's aesthetics with steel-structure table that bursts into the space, filling it with industrial airs. The Do table is a blend of its own identity, full of strength, creating radically different spaces.

DESIGNED BY NADIA ARRATIBEL



ondarreta

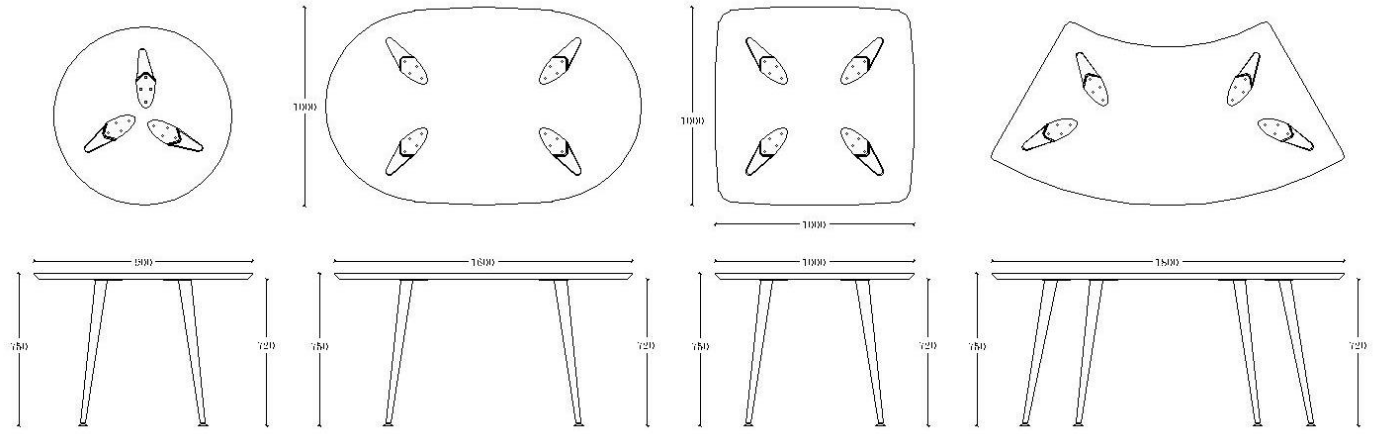

DIMENSIONS

Height: 75 cm(29,5”)

Square
100 cm x 100 cm (39.4” x 39.4”)
120 cm x 120 cm (47.2” x 47.2”)
140 cm x 140 cm (55.1” x 55.1”)
[width x depth]

round
Ø 90 cm (35.4”)
Ø 120 cm (47.2”)
Ø 140 cm (55.1”)

Oval
120 cm x 100 cm (47.2” x 39.4”)
160 cm x 100 cm (63” x 39.4”)
200 cm x 120 cm (78.7” x 47.2”)
[width x depth]

Trapezoidal
180 cm x 100 cm
[width x depth]

WEIGHT

30 kg [66.1 lb] (100 x 100)
40 kg [88.2 lb] (120 x 120)
51 kg [112.4 lb] (140 x 140)
20 kg [44.1 lb] (Ø 90)
33 kg [72.8 lb] (Ø 120)
42 kg [92.6 lb] (Ø 140)
30 kg [66.1 lb] (120 x 100)
38 kg [83.8 lb] (160 x 100)
48 kg [105.8 lb] (180 x 120)
53 kg [116.8 lb] (200 x 120)
34 kg [75 lb] (180 x 100)

PACKAGING

100 cm x 100 cm: 115 cm x 110 cm x 15 cm
(45,3” x 43,3” x 5,9”)
120 cm x 120 cm:135 cm x 130 cm x 15 cm
(53,1” x 51,2” x 5,9”)
140 cm x 140 cm: 155 cm x 150 cm x 15 cm
(55,1” x 59,1” x 5,9”)
Ø 90 cm: 95 cm x 95 cm x 15 cm
(37,4” x 37,4” x 5,9”)
Ø 120 cm: 135 cm x 130 cm x 15 cm
(53,1” x 51,2” x 5,9”)
Ø 140 cm: 155 cm x 150 cm x 15 cm
(55,1” x 59,1” x 5,9”)
120 cm x 100 cm: 135 cm x 110 cm x 15 cm
(53,1” x 43,3” x 5,9”)
160 cm x 100 cm: 175 cm x 110 cm x 15 cm
(68,9” x 43,3” x 5,9”)
200 cm x 120 cm: 215 cm x 130 cm x 15 cm
(84,6” x 51,2” x 5,9”)
180 cm x 100 cm: 195 cm x 110 cm x 15 cm
(76,8” x 43,3” x 5,9”)

ORIGIN

100% Made in Europe

DESIGN

Ondarreta Team

ondarreta







COMPONENTES

STRUCTURE

Material
3 mm (0.1") thickness cold laminated St-37 quality steel sheet, laser cut and folded.
Tensile Strength: 340-470 N/mm2 (49,300-68,160 psi);
Elastic Limit > 235 N/mm2 (32,080 psi); Elongation > 25%,
Surface Hardness > 110 HB.

Finish
Colour epoxy

TABLETOP

Laminate + birch plywood
High pressure laminate glued and pressed in high temperatures on a Birch plywood wood table with beveled chants.

Arpa Fénix + birch plywood
Combination of arpa fenix sheet and beveled birch plywood. Arpa fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

Características técnicas:
Urea-formol glue: low formaldehyde emission (E1 European Normative)
The wood has the PEFC certificate.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical characteristics:
Thickness (ISO 2360): between 60 and 90 µm.
Adherence (ISO 2409): Grade: 0 (maximum adherence)

WOOD FINISH

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

Technical characteristics:
Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.