TECHNICAL CHARACTERISTICS

BDRY150EE

Dry

Bench


Its steel frame structure, that surprises thanks to the design of its sober and simple lines of minimal dimensions. The Dry bench, adaptable to any corner, due to its multiple sizes and finishes..


DESIGNED BY ONDARRETA TEAM




ondarreta






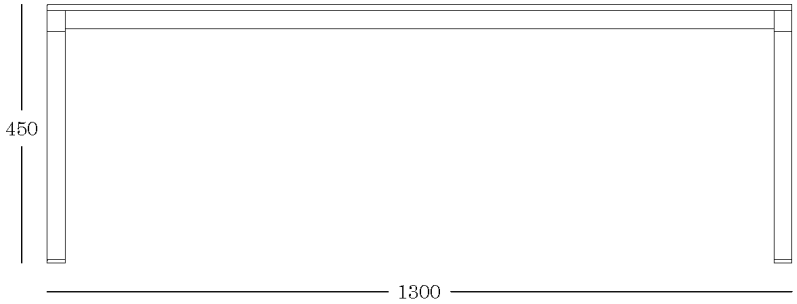







DIMENSIONS

100/130/150 cm x 45 cm x 45 cm
(39.4”/ 51.2”/ 59” x 17.7” x 17.7”)
[width x depth x height]

WEIGHT

width 100: 14,5 kg (32 lb)
width 130: 19 kg (41,9 lb)
width 150: 22 kg (48,5 lb)

PACKAGING

1 bench per box

ORIGIN

100% Made in Europe

DESIGN

Ondarreta Team

ondarreta







COMPONENTS

FRAME

Material
30 mm (1.2”) side and mm (0.08”) thickness cold laminated St-37 quality steel tube.
Tensile Strength: 340-470 N/mm2 (49,300-68,160 psi); Elastic Limit > 235 N/mm2 (32,080 psi); Elongation > 25%, Surface Hardness > 110 HB.

Finish

Colour epoxy

SEAT

Laminate
High pressure laminate glued and pressed in high temperatures on a 20 mm (0.8”) thickness technical wood table. It's edged with a PVC panel glued with a special hot melt adhesive.

Beech
Beech plywood board shell, 20 mm (7.9”) thick CNC machined.

Shell’s Technical characteristics:
Urea-formol glue: low formaldehyde emission (E1 European Normative)
The wood has the PEFC certificate.

Finish

Stained, laminate or fabric

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical characteristics:
Thickness (ISO 2360): between 60 and 90 µm.
Adherence (ISO 2409): Grade: 0 (maximum adherence)

COM REQUIREMENT

70 cm / 75 cm / 155 cm (27.5” / 29.5” / 61”)