TECHNICAL CHARACTERISTICS

MJUNO

Juno


Table double


A family of soft and round shapes that reinforce its character. With delicate, balanced and expressive proportions, the double version adapts to any environment in a friendly, integrated and honest way.


DESIGNED BY MADE STUDIO



ondarreta

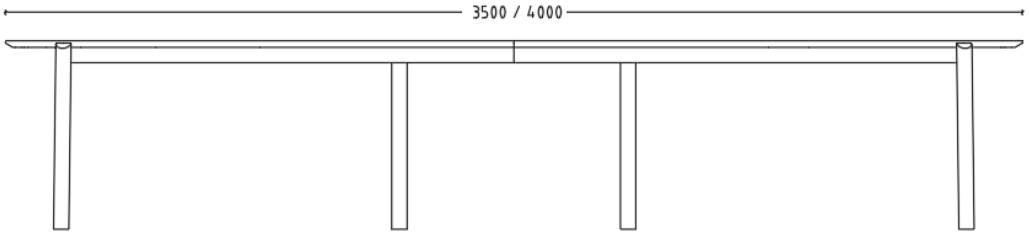

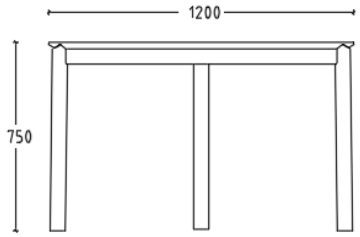

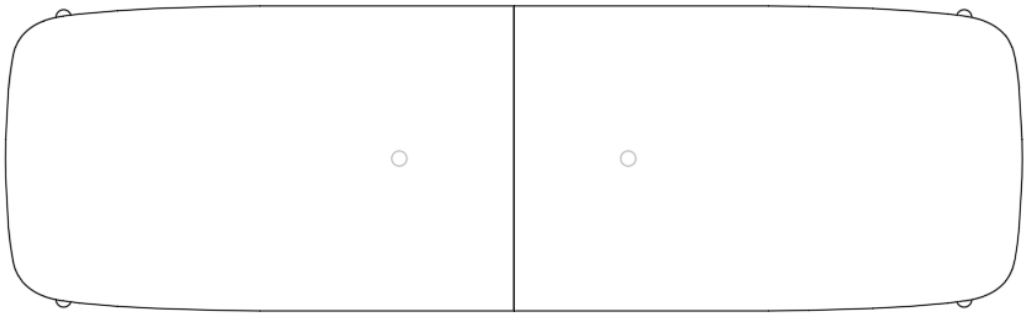

DIMENSIONS

Height: 74 cm (29,1")
Free height: 65,5 cm (25,8")

350 cm x 120 cm (137,8" x 47,2") [width x depth]
400 cm x 120 cm (157,5" x 47,2") [width x depth]

WEIGHT

94 kg [207,2lb] (350x120)
107 kg [236 lb] (400x120)

PACKAGING

350 x 120 cm
Box 1: 190 cm x 125 cm x 17 cm
Box 2: 120 cm x 60 cm x 15 cm
Box 3: 120 cm x 60 cm x 15 cm
Box 4: 120 cm x 60 cm x 15 cm

400 x 120 cm
Box 1: 202 cm x 125 cm x 17 cm
Box 2: 120 cm x 60 cm x 15 cm
Box 3: 120 cm x 60 cm x 15 cm
Box 4: 120 cm x 60 cm x 15 cm

ACCESORIES

Top Access inlay with cover in the same finish as the tabletop

Cable tray for Top Access inlay

Electrification fixed to the cable tray

CERTIFICATION

Certified and designed in accordance with the Ecodesign standard UNE-EN ISO 14006:2011.

PEFC certified wood.

ORIGIN

100% Made in Europe

DESIGN

Made Studio

ondarreta





COMPONENTS

LEGS

Oak
4 legs entirely in solid oak wood with a diameter of 60 mm (2,36 ").

Finish
Stained

Steel
Recessed central legs welded to omega cable pass in a precision cylindrical tube of 60 mm diameter and 2 mm thickness, made of cold-rolled steel of E-220 quality (according to EN-10305 standard).
Tensile strength > 310 N/mm²;
Elastic limit > 220 N/mm²;
Elongation > 23%.
They include machining for cable access and a leveler.

Finish:
Black epoxy and linen

TABLETOP

Oak + MDF
European Oak sheet on technical wood table of 25 mm (0.98") thick, CNC machined and beveled edge.

Finish
Stained oak

Laminate + MDF
High-pressure plain colour laminate glued and pressed in high temperatures on technical wood table of 25 mm (0.98") thick, CNC machined and beveled edge.

Arpa Fénix + MDF
Arpa Fénix laminate glued and pressed in high temperatures on technical wood table of 25 mm (0.98") thick, CNC machined and beveled edge.
Arpa fenix is an extremely opaque, anti-fingerprint and nanotechnological material that heals superficial micro-scratches.

Technical characteristics:
Urea-formol glue: low formaldehyde emission (E1 European Normative)
The wood has the PEFC certificate.

FRAME

Material
60 mm (2.36") height extrusion aluminum profile.
Complementary 5 mm (0.17") thick steel sheet, laser cut and later welded.

Finish
Black and linen colour epoxy

ondarreta





WOOD FINISH

STAIN

Pigmented enamel with a transparent stain coating. Reactive drying paints: excellent adherence between layers and better mechanical resistance.

Technical characteristics:
Satisfying UNE-EN 71-3 normative; Formaldehyde free compounds.

METAL FINISHES

EPOXYS

Powder covering formulated with polyester resins, with good both mechanical and chemical properties, outdoor maximum resistance and noxious compounds free. Electrostatic application and oven curated at 200ºC (392ºF).

Technical characteristics:
Thickness (ISO 2360): between 60 and 90 µm.
Adherence (ISO 2409): Grade: 0 (maximum adherence)

ondarreta